

میب: ۲٬۷۷۰ دیس الإمارات العربیة المتحدة هاتف ۲۹۲۷۷۳۳ و ۴۹۷۰ ماتف هاتف ۲۸۵۵-۱۹۶۵ (۹۷۰ ultimatestar.tech@gmail.com cs@ultimatestar.contracting.com

A WORK OF ART. POWERED BY AIR





من ب : ۲۰۶۷ دین الامارات العربیة المتحدة هاتف ۲۹۷۲۹۳۱ ۱۹۷۵ ۱۹۷۵ ۱۹۷۵ ۱۹۷۵ ۱۹۷۵ ۱۹۷۵ ۱۹۷۵ ultimatestar.tech@gmail.com

THE COMPANY BIG IDEAS REVOLUTIONIZE THE WORLD



ص.ب: ۲۰۲۱ دبی الامارات العربیة المتحدة هاتف ۲۹۲۲۷۳۱ ۱۹۷۰ م۱۳۹۰ هاتف ۴۹۷۱ ۱۹۶۵ ۱۹۷۰ بالاست ultimatestar.tech@gmail.com cs@ultimatestar.contracting.com

FOUNDED IN 2002

Pneumatic Vacuum Elevators, LLC (PVE) is the inventor and sole manufacturer of the world's only Air-Driven Home Elevator, the Pneumatic Elevator.

Powered by the most abundant resource in the world, AIR, Pneumatic Elevators are innovative, space-saving home lift solutions that have revolutionized the way people and goods are transported vertically inside their homes.


Using Pneumatic Technology® to generate lift, these self-supporting, panoramic elevators smoothly move between floors while requiring much less space, energy & maintenance when compared to traditional elevators.

With three models to choose from, ranging from a single passenger to a three passenger wheelchair-accessible model, Pneumatic Elevators simply rest on the existing ground floor, offering an ease of installation while providing an aesthetically pleasing solution for both retro-fit & new construction projects.

Manufactured in Miami, Florida, USA, PVE is an innovative, technology driven company that thinks outside of the box, having our customers always in mind and our engineering capabilities second to none.

Utilizing materials and components of the highest quality available, Pneumatic Elevators unique design is based around our patented technology and PVE is proud to manufacture fully certified, safe and reliable home elevators for use worldwide.

With manufacturing facilities in Argentina, Spain and India, PVE has over 20,000 successful installations worldwide in over 100 countries. Partnered with authorized distributors across the globe, PVE ensures all end users the best quality of installation and service for their home elevators.

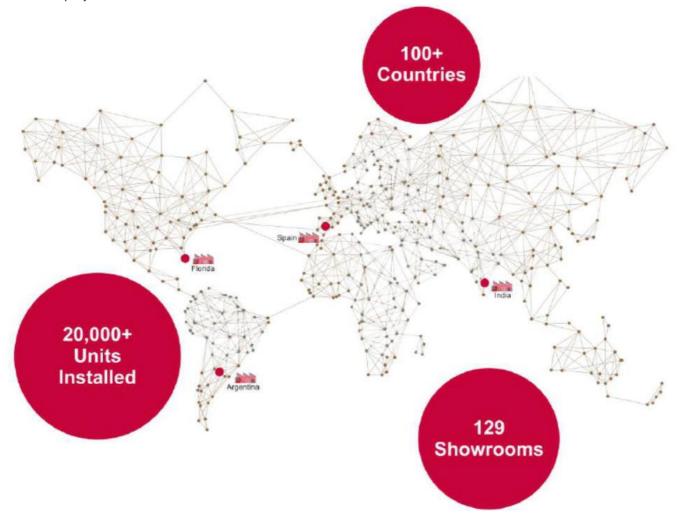

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



INNOVATIVE

By using Pneumatic Technology® to generate areas of higher and lower pressure within the cylinder hoistway, Pneumatic Elevators combine a vertical cylinder with a fully enclosed car that smoothly moves up and down through air suction and gravity.

What advantages do Pneumatic Elevators offer?

Not requiring a pre-construction shaft, pit or machine room, Pneumatic Elevators simply rest on the existing ground floor, offering more flexibility of installation while optimizing space within the home.

With minimal pre-construction requirements, Pneumatic Elevators are quick & easy to install with installations being completed in as little as 2 - 3 days.

A plug & play system requiring a 220 volt power supply, these eco-friendly elevators utilize very few moving parts during operation and have minimal maintenance requirements with no harmful oils, gases or lubricants utilized for operation.

Certified for up to 5 stops or 50 feet in total rise, Pneumatic Elevators are custom built to the height of each home with three different sizes available to meet your projects spatial and installation requirements.



ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



الامارات العربية المت ACE 7403-3370 (19+ ultimatestar.tech@gmail.com

1. During ascent, the system extracts air from the top, creating a vacuum that makes the elevator car go upwards.

> 2. For descent, the intake of air is controlled, causing the car to smoothly move downwards due to gravity.

Pneumatic Technology® simplifies the operation while reducing wear and tear of components: a smooth, safe & reliable system.




Components

There are three main components to the transparent, self-supporting Pneumatic Elevator:

Exterior Cylinder - Made up of an aluminum frame and polycarbonate panels that offers panoramic visibility.

Elevator Car - Fully welded and enclosed cabin made of steel, which houses the brake and safety mechanisms along with the proprietary seal located on top of the car.


PVE Machinery - Installed on top of the upper floor cylinder or remotely located. Houses the turbine motors, valves and PVE controller used to operate the elevator.

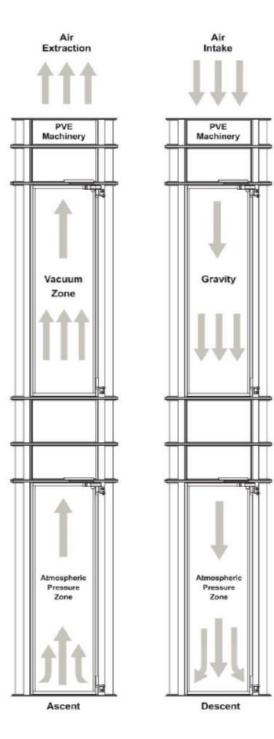

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ٢٠٤٧ ديس الإمارات العربية المتحدة هاتف ٢٩٢٧٣٢٦ (٩٧٠ هاتف ٢٨٥٤-٤٤٢٥ (٩٧٠

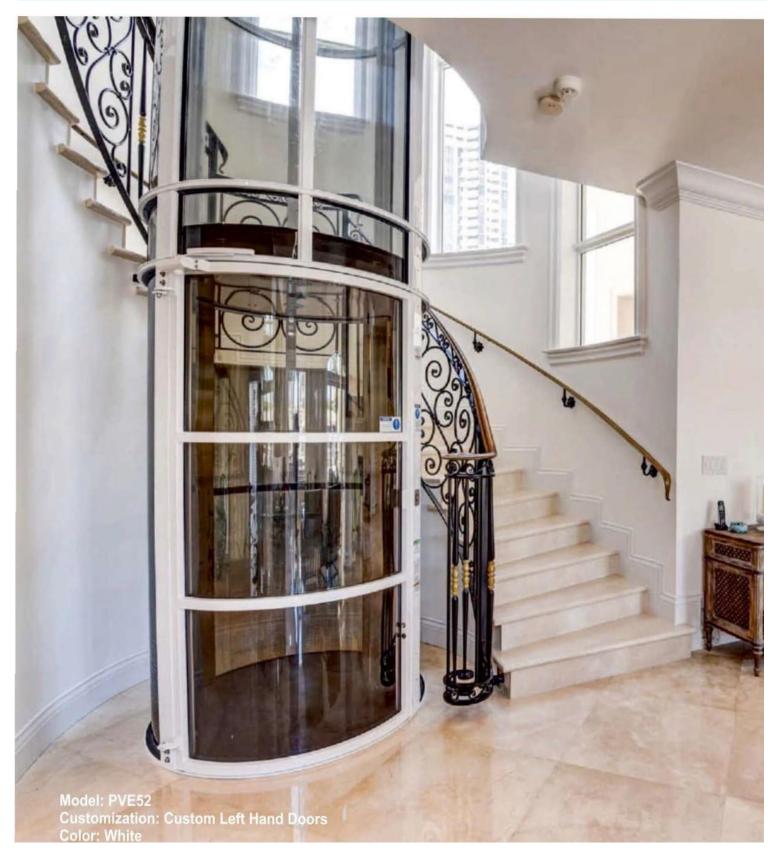

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ۹۶۷۰ دبی الامارات العربیة المتحدة هاتف ۲۹۲۷۳۳۰ ۹۷۱۰ هاتف ۲۹۷۱ ۵۲۵۴۰ ۹۷۱ timatestar.tech@gmail.con

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ELEGANT DESIGN

At PVE, our mission is to create home elevator solutions in which design and technology coincide. Where the utilization of attractive materials and the application of fundamental physics combine to produce an innovative & aesthetically pleasing elevator that enhances homeowner's standard of living.

The result: Pneumatic Elevators.

With its minimal footprint, modern design & revolutionary technology, these eco-friendly elevators go where other home elevators simply cannot.

A versatile solution that fits into even the tightest of spaces, all three Pneumatic Elevator models are self-supporting with minimal pre-construction requirements allowing a faster & more flexible installation.

Utilizing a unique, circular design, these panoramic elevators offer 360° degree visibility while traveling up to 5 stops or 50 feet in total rise making them beautiful additions to any residence.

"Green Elevators" that operate using Pneumatic Technology®, minimal energy consumption is utilized during ascent and gravity is simply used for descent ensuring Pneumatic Elevators have a nominal impact to your annual electrical usage.

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



الإمارات العربية المتحدة الإمارات العربية المتحدة الإمارات العربية المتحدة المثلث الم



ABSOLUTE SAFETY

In the event of power failure while in operation, the Elevator Car will automatically descend to the lowest level and the mechanical door lock opens to allow passengers to safely exit.

ultimatestar.tech@gmail.com cs@ultimatestar.contracting.com



ص.ب: ٢٠٤٧ ديس الإمارات العربية المتحدة هاتف ٢٩٧٧٢٧٠ (٩٧٠ هاتف ٢٥٨٦-١٦٤٥ (٩٧٠



ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ACE TAGB-3370 (VP+

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com

3 MODELS AVAILABLE

With 3 Models Available, There Is A Pneumatic Elevator To Fit Any Projects Needs.







Single Passenger Elevator

30 Inches (750 mm) External Diameter

Lift Capacity (159 kg)

Traveling Speed 0.15 m/s

Automatic Interior LED Lighting & Fan

In-Line Door Openings



PVE 37





Two Passenger Elevator

37 Inches (950 mm) External Diameter

Lift Capacity (205 kg)

Traveling Speed 0.15 m/s

Automatic Interior LED Lighting & Fan In-Line, Walk-Through & 90° Door Openings*

*Limitations With 90° Door Openings



PVE 52







Three Passenger Elevator Wheelchair Accessible

52 11/16 Inches (1,338 mm) External Diameter

Lift Capacity (238 kg)

Traveling Speed 0.10 m/s

Automatic Interior LED Lighting & Fan In-Line & Walk-Through Door Openings

PVE | 8

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ۲۰۱۰ دین الإمارات العربیة المتحدة هاتف ۲۹۲۲۲۳-۲۰۱۰ (۹۲۰ هاتف ۲۵۲۲-۲۵۲۵ (۹۲۰ Itimatestar.tech@gmail.con

ultimatestar.tech@gmail.com cs@ultimatestar.contracting.com

PVE MODEL SPECIFICATIONS

Technical Specifications For All 3 Pneumatic Elevator Models.

General	pve .30	pve 37	pve. 52
Maximum Load (Kgs)	159	205	238
Speed	30 fpm (0.15m/s)	30 fpm (0.15m/s)	20 fpm (0.10m/s)
Number of Stops	2 to 5	2 to 5	2 to 5
Maximum Distance (Feet)	50	50	50
Car			
Inside Diameter - Widest Point (Inches)	25"	32" 1/2	46" 3/4
Doorway Width (Inches)	20"	20" 1/2	32"
One-Touch Operation	Yes	Yes	Yes
Wheelchair Accessible	No	No	Yes
Door			
Available Entrances **	0°	0°, 90°, 180° and 270°	0° and 180°
Possibility of an Automatic Door	Yes	Yes	Yes
Safety			
Power Failure Automatic Descent	Yes	Yes	Yes
Alarm Button / Safety Telephone	Yes	Yes	Yes
Electricity			
Supply	220 V/20 A	220 V/26 A	220 V/32 A
Power	3.3 kW	5.5 kW	6.6 kW
Installation Requirements			
Finished Perforation Diameter (Inches)	32"	39"	54" 11/16
Minimum Height on Upper Floor (Inches) *	107" (8 ft. 10 inch)	107" (8 ft. 10 inch)	107" (8 ft. 10 inch)

^{*} Lower Height Clearances are possible. Speak to a PVE Sales Representative to confirm the feasibility of your desired installation.

^{**} Door Configuration Options available for review on Page 18.

P.O. Box 60471, Dubai United Arab Emirates Mobile: +971 564404586 Mobile: +971 503927336 ultimatestar.tech@gmail.com

cs@ultimatestarcontracting.com



الإمارات العربية المتحدة هاتف ٢٩٧١ ٥٠٣٩ ١٩٧٠ ماتف هاتف ٢٩٧١ ٥٦٤٤٠٤٥٨٦ ماتف ultimatestar.tech@gmail.com









ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ٢٠٤٧ ديس الإمارات العربية المتحدة هاتف ٢٩٧٢٧٢٠ (٩٧٠ هاتف ٢٨٥٤-١٤٤٥ (٩٧٠









ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ۱۹۷۰ دبی الامارات العربیة المتحدة هاتف ۲۹۲۲۲۲۲ (۹۲۰ هاتف ۲۸۵۲-۱۹۷۵ (۹۲۰ ناmatestar.tech@gmail.com



ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



Special Applications

Intended As A Residential Elevator, There Are A Few Unique Applications
Where The Elegance Of The Pneumatic Elevator Can Shine Through.

Stage Elevator





It is recommended to speak to a local authorized PVE distributor to discuss local codes and regulations prior to considering the Pneumatic Elevator for any Stage Applications.

Yacht & Marine Elevator

Easy-To-Install, Space-Saving Elevators for Yacht & Marine Applications.



With it's minimal footprint, ease of installation and plug & play features, Pneumatic Elevators are the ideal elevator solutions for any Yacht & Marine Applications.

With no pre-construction pit, hoist-way or machine room required, each Pneumatic Elevator is custom built to the height of the vessel while adding an elegant design feature that will capture people's attention & imagination.


ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



الامارات العربية المتحدة בוש דדדעדף ד-0 רעף+ ACE 7403-3370 (19+ ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com

PVE MACHINERY CONFIGURATIONS

Depending On The Available Height In Your Home, There Are Different PVE Machinery Configurations Available For Your Pneumatic Elevator.

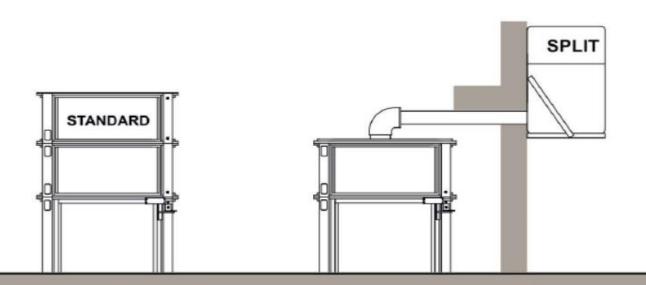

STANDARD MOUNT CONFIGURATION

A quick to install, aesthetically pleasing solution. Standard Mounted applications allow for the PVE Machinery to be installed directed on top of the upper-floor cylinder.

The simplest solution in terms of installation,

MINIMUM HEIGHT ON THE UPPER FLOOR 2700 mm *

* Lower Height Clearances are possible. Speak to a PVE Sales Representative to confirm the feasibility of your desired installation.

SPLIT-UNIT MOUNT CONFIGURATION

Designed to accommodate installations with lower overhead clearances, Split-Unit Mounted applications allow for the PVE Machinery to be remotely located from the top of the unit.

With both Indoor and Outdoor Split-Unit options, remotely locating the machinery reduces the minimum height required on the top floor with the PVE Machinery installed up to 30 linear feet away from the top of the upper-floor cylinder.

Connected to the top of the elevator by two 4" inch PVC pipes or a flex hose alternative, Split-Unit Mounted applications requires a 220 volt power supply to be located wherever the PVE Controller is installed.

MINIMUM HEIGHT ON THE UPPER FLOOR

2700 mm*


cs@ultimatestarcontracting.com




الامارات العربيا ACE 7403-3370 (19+ ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com

STANDARD MOUNT

PVE Machinery Installed Directly Above The Unit.





STANDARD MOUNT

allows for the PVE Machinery to be installed directly on top of the upper floor cylinder.

ADVANTAGES

Standard Mounted Machinery.

Quick & Easy Installation.

Self-Contained, Plug & Play Operation.

MINIMUM HEIGHT ON UPPER FLOOR 2700 mm *

STANDARD MOUNT **ACOUSTIC**

Utilizing audio engineering and sound ratings, the Standard Mount Acoustic

ADVANTAGES

Decibel Reducing Solution for Standard

Plug & Play System.

Easy-to-Install Machinery Option.

MINIMUM HEIGHT ON UPPER FLOOR 2700 mm *

* Lower Height Clearances are possible.

Speak to a PVE Sales Representative to confirm the feasibility of your desired installation.


Mobile: +971 503927336 ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ۲۰۹۷ دین الإمارات العربیة المتحدة هاتف ۲۹۷۲۹۳ و۲۹۷۲۹ هاتف ۴۷۷ ۲۹۶۶-۵۸۸ ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com

SPLIT-UNIT MOUNT

PVE Machinery Remotely Located Up To 30 Linear Feet Away From The Top Of The Unit.

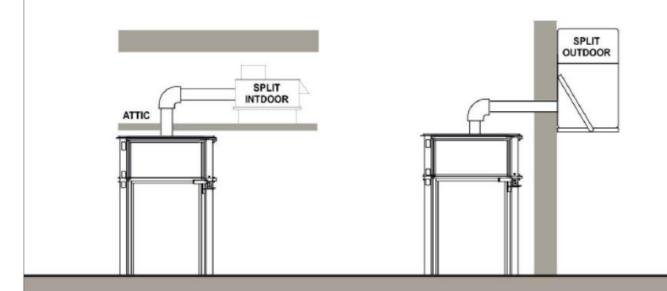

SPLIT-UNIT MOUNT INDOOR

Designed to accommodate installations with lower Overhead Clearances on the top floor, the Split-Unit Mount - Indoor machinery option is an upgrade that allows the PVE Machinery to be installed remotely inside the home.

Connected to the top of the elevator by two 4" inch PVC pipes or a flex hose alternative, the Split-Unit machinery can be installed up to 30 linear feet away from the top of the unit and is often located in attics, adjacent closets or mechanical rooms within the home.

ADVANTAGES

Lower Overhead Clearance Requirements on the Top Floor.

Reduction of Decibel Ratings Inside Home.

Customizable Positioning of the Split-Unit Machinery Inside the Home.

MINIMUM HEIGHT ON UPPER FLOOR

2700 mm *

SPLIT-UNIT MOUNT OUTDOOR

Designed to allow the PVE Machinery to be installed externally from the home, the Split-Unit Mount - Outdoor machinery option is an upgrade designed to allow the PVE Machinery to be installed in an exterior setting.

Installed inside a fiber glass enclosure, this PVE Machinery solution is connected to the top of the elevator by two 4" inch PVC pipes or a flex hose alternative and can be installed outside up to 30 linear feet away from the top of the unit.

ADVANTAGES

Lower Floor-to-Ceiling Height Requirement

Most Efficient Audio Solution for PVE Machinery.


Customizable Positioning of the Split-Unit Machinery Outside the Home.

MINIMUM HEIGHT ON UPPER FLOOR

2700 mm *



س.ب: ۲۰۶۸ تبی الإمارات العربیة المتحدة هاتف ۲۹۲۷۳۳ ۱۰۵۰ ۱۳۹۰ هاتف ۲۶۵۰۲۵۸۳ ۱۳۹۰ ultimatestar.tech@gmail.com

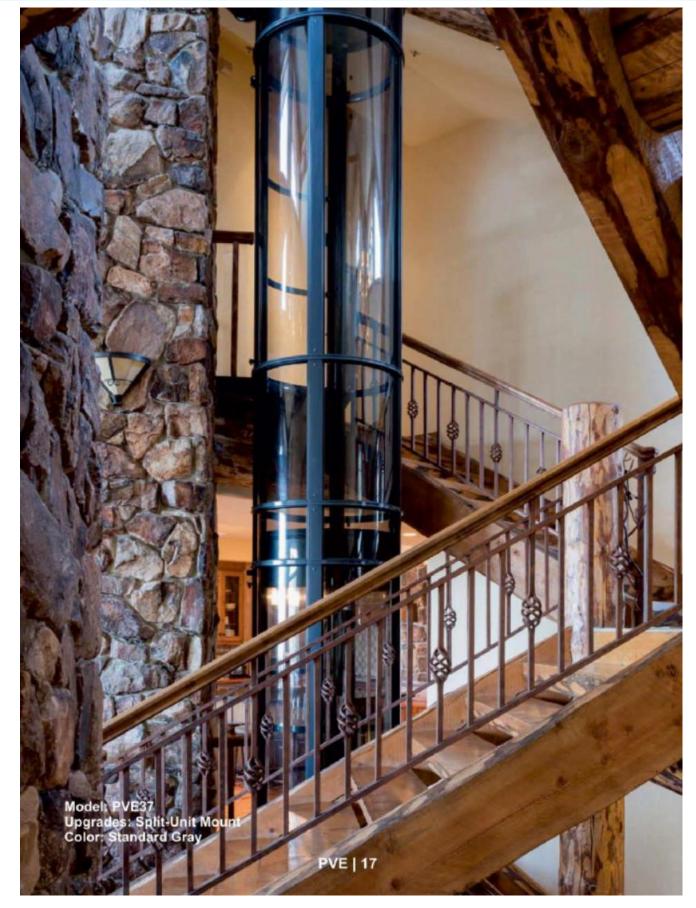


ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ٢٠٤٧ دين الإمارات العربية المتحدة هاتف ٢٣٧٧٢٢-٥ (٩٧٠ هاتف ٢٨٥٤-١٦٤٥ (٩٧٠

ultimatestar.tech@gmail.com cs@ultimatestar.contracting.com

PVE INSTALL

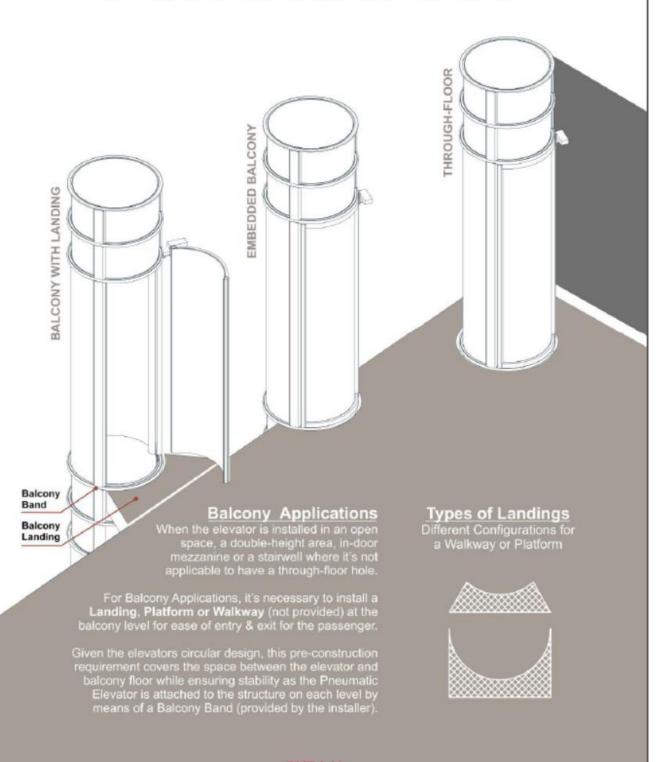

ultimatestar.tech@gmail.com cs@ultimatestarcontracting.com



ص.ب: ٢٠٤٠ دين الإمارات العربية المتحدة هاتف ٢٩٧٧٧٣٠ - ٢٧٥٠ هاتف ٢٨٥٤-١٢٥٤ (٩٧٠



